




STAHL-MASCHINEN-
& APPARATEBAU GMBH

HEATING CIRCUIT MODULES

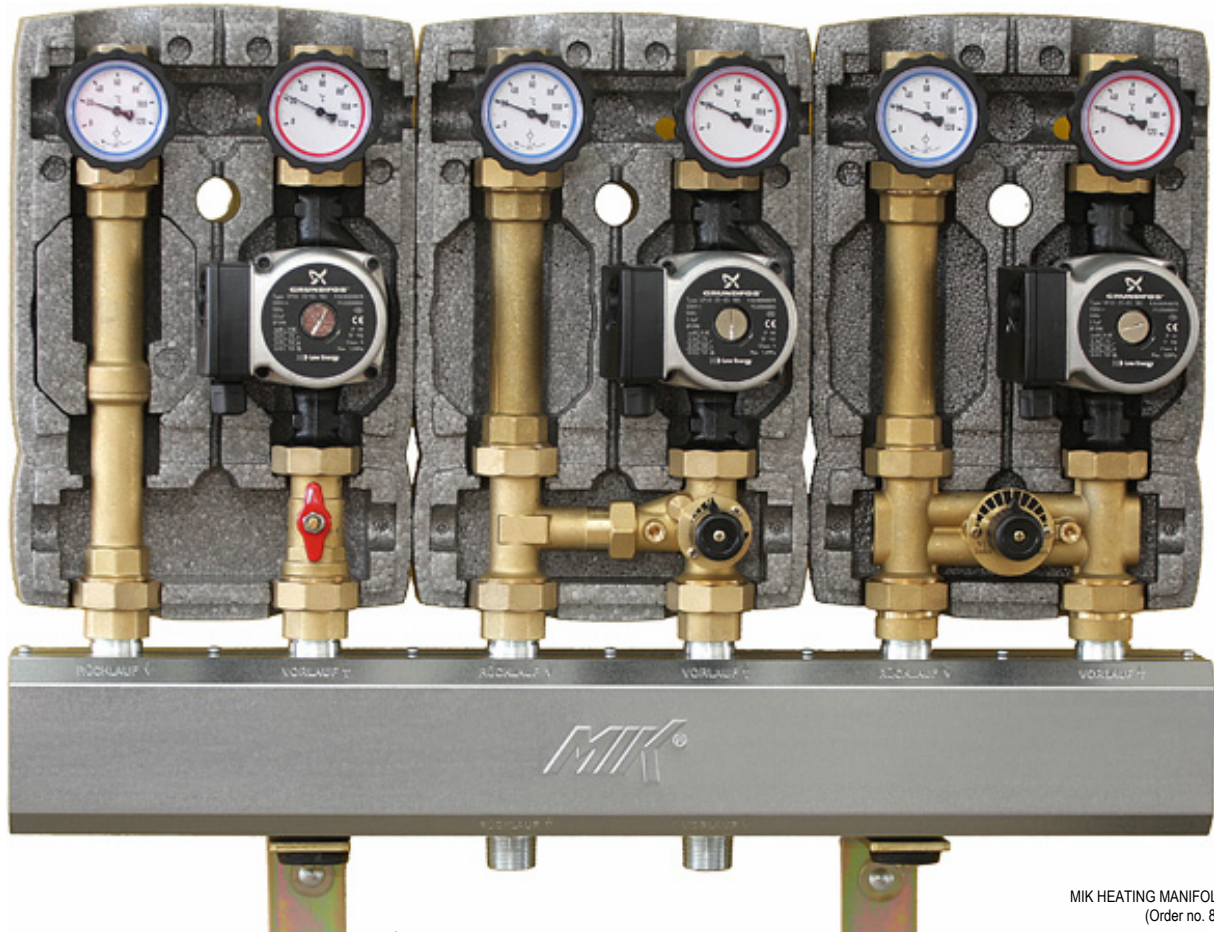

MIK HEATING MANIFOLD HV-3
(Order no. 840 004)

**Heating circuit module HK 25-2
with insulation, unmixed
(Order no. 870 002)**
Output up to 50 kW at $\Delta T=20^{\circ}\text{C}$

Supply:

- 1 supply pump flange ball valve with thermometer hand dial (thermometer ring: red)
- 1 x pump flanged ball valve with toggle handle
- 2 x cap nuts and seals
- 1 x screw coupling 1"

Return:

- 1 x return pump flanged ball valve with thermometer hand dial (thermometer ring: blue) and gravity brake which can be switched off by turning the hand dial 45° .
- 1 x cap nut and seal
- 1 x brass pipe
- 1 x screw coupling 1"

Can be supplied with or without pump

Distance between supports 125 mm

**Heating circuit module HK 25-3
with 3-way mixer and insulation
(Order no. 870 003)**
Output up to 35 kW at $\Delta T=20^{\circ}\text{C}$

Supply:

- 1 supply pump flange ball valve with thermometer hand dial (thermometer ring: red)
- 1 x 3-way mixer**
- 2 x cap nut and seal
- 1 x screw coupling onto 1"

Return:

- 1 x return pump flanged ball valve with thermometer hand dial (thermometer ring: blue) and gravity brake which can be switched off by turning the hand dial 45° .
- 2 x cap nut and seal
- 1 x brass pipe
- 1 x T piece
- 1 x screw coupling onto 1"

Can be supplied with or without pump

**Heating circuit module HK 25-4
with 4-way mixer and insulation
(Order no. 870 004)**
Output up to 28 kW at $\Delta T=20^{\circ}\text{C}$

Supply:

- 1 supply pump flange ball valve with thermometer hand dial (thermometer ring: red)
- 2 x cap nut and seal
- 1 x 4-way mixer**
- 1 x screw coupling onto 1"

Return:

- 1 x return pump flanged ball valve with thermometer hand dial (thermometer ring: blue) and gravity brake which can be switched off by turning the hand dial 45° .
- 2 x cap nut and seal
- 1 x brass pipe
- 1 x screw coupling onto 1"

Can be supplied with or without pump