



HYDRAULIC SEPARATORS

HW 60/125-1"
HW 60/125-1¼"

up to 2 m³/h
up to 3 m³/h

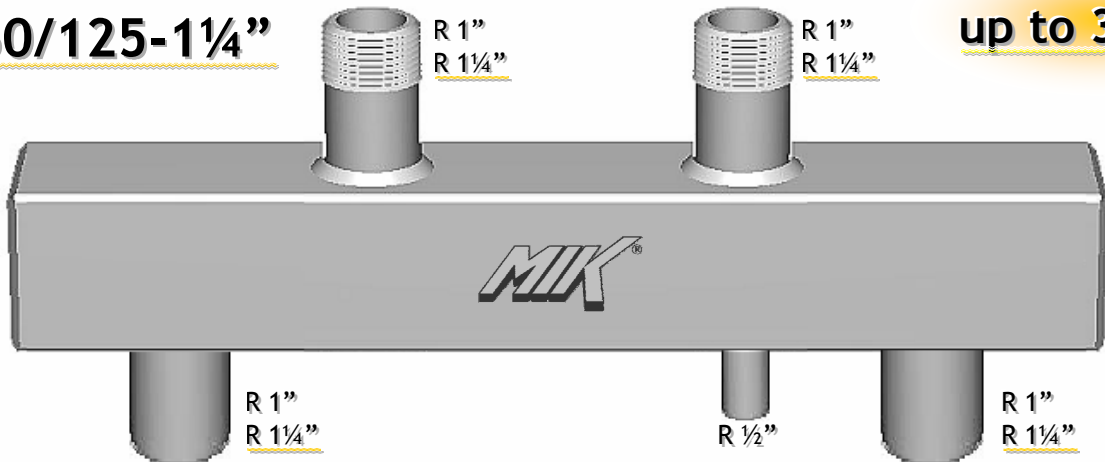

Hydraulic separator HW 60/125-1" and HW 60/125-1¼"

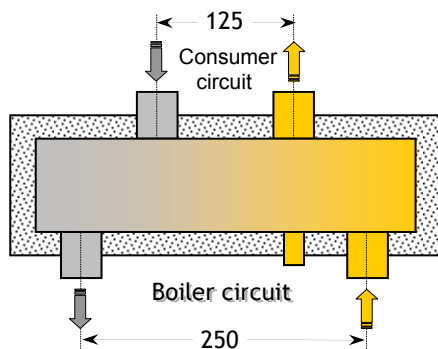

- ❑ Exchange chamber made of 60x60 square tube
- ❑ Lower boiler circuit - couplings
- ❑ Upper connecting nipple for consumer circuit
- ❑ R ½" coupling for temperature sensor
- ❑ Hydraulic separator is galvanised and factory-tested to 12 bar pressure
- ❑ Max. operating pressure 6 bar
- ❑ Max. supply temperature 90°C
- ❑ Insulated with galvanised sheet steel jacket:
 - 0.55 mm galvanised sheet steel jacket
 - 25 mm insulation to DIN 4102-B2 standard

MIK Hydraulic separator with insulation and screw coupling



- ❑ Exchange chamber made of 60x60 square tube
- ❑ Lower boiler circuit - couplings
- ❑ Upper connecting nipple for consumer circuit
- ❑ Coupling R ½" for temperature sensor
- ❑ 25 mm insulation to DIN 4102-B2 standard with galvanised sheet steel jacket

Type	Flow rate	Screw couplings	Product No.
HW 60/125-1"	up to 2 m ³ /h	1" IG/IG	850 012
without screw couplings			850 012A
HW 60/125-1¼"	up to 3 m ³ /h	1¼" IG/IG	850 011
without screw couplings			850 011A

Hydraulic separator type **HWK 60/125-1"** can be combined with **HV** and **HVT** heating manifolds.

Hydraulic separator type **HWK 60/125-1¼"** can be combined with **HV70** heating manifolds.

MIK Wall mountings H-HV for insulated separator



- ❑ Offset 100 or 150 mm to middle of hydraulic separator
- ❑ Galvanised
- ❑ Including screws and wall plugs
- ❑ Pack contents: 2 pieces

