



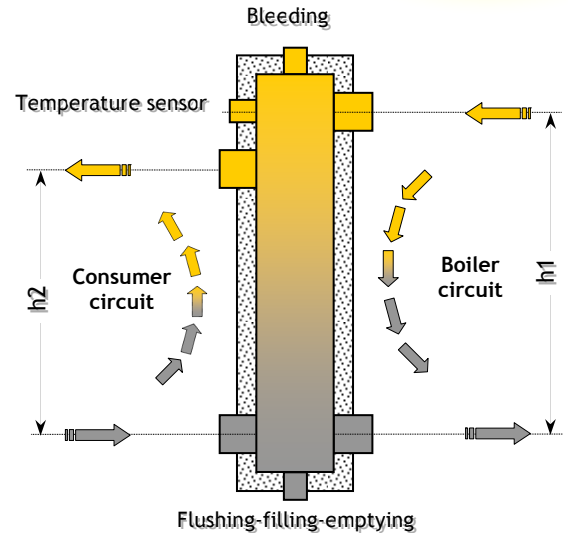

HW 60/375

up to
3,5 m³/h

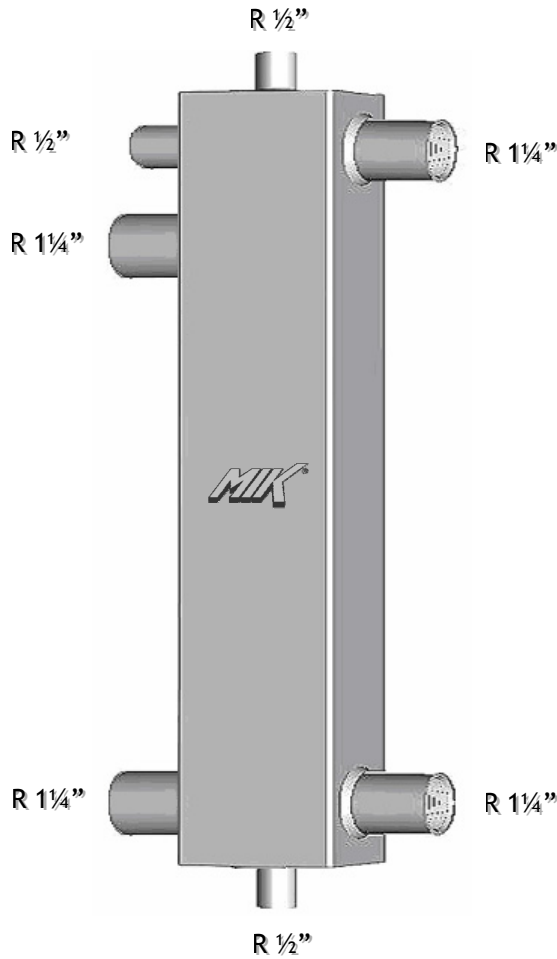

- ❑ Exchange chamber made of 60x60 square tube
- ❑ Connections: R 1/4" couplings
- ❑ Upper coupling for bleeding connection and lower connection for flushing-filling-emptying
- ❑ Coupling R 1/2" for temperature sensor
- ❑ Hydraulic separator is galvanised and factory-tested to 12 bar pressure
- ❑ Max. operating pressure 6 bar
- ❑ Max. supply temperature 90 °C
- ❑ Insulated with galvanised sheet steel jacket:
 - galvanised sheet steel jacket
 - 25 mm EPS insulation to DIN 4102-B2 standard


MIK Hydraulic separator with insulation
HW 60/375



Type	Max. flow rate	Dimensions h1, h2 [mm]	Insul.	Product No.
HW 60/375	3.5 m ³ /h	375, 315	25 mm	850 013

Mounting suggestion:

MIK Wall mountings H-HV for insulated separator



- ❑ Offset 100 or 150 mm to middle of hydraulic separator
- ❑ Galvanised
- ❑ Including screws and wall plugs
- ❑ Pack contents: 2 pieces

Type	Offset to middle of hydraulic separator	Product No.
H-HV 100	100 mm	840 007
H-HV 150	150 mm	840 008